




**Chevrolet
Bolt EV
2022-2023**

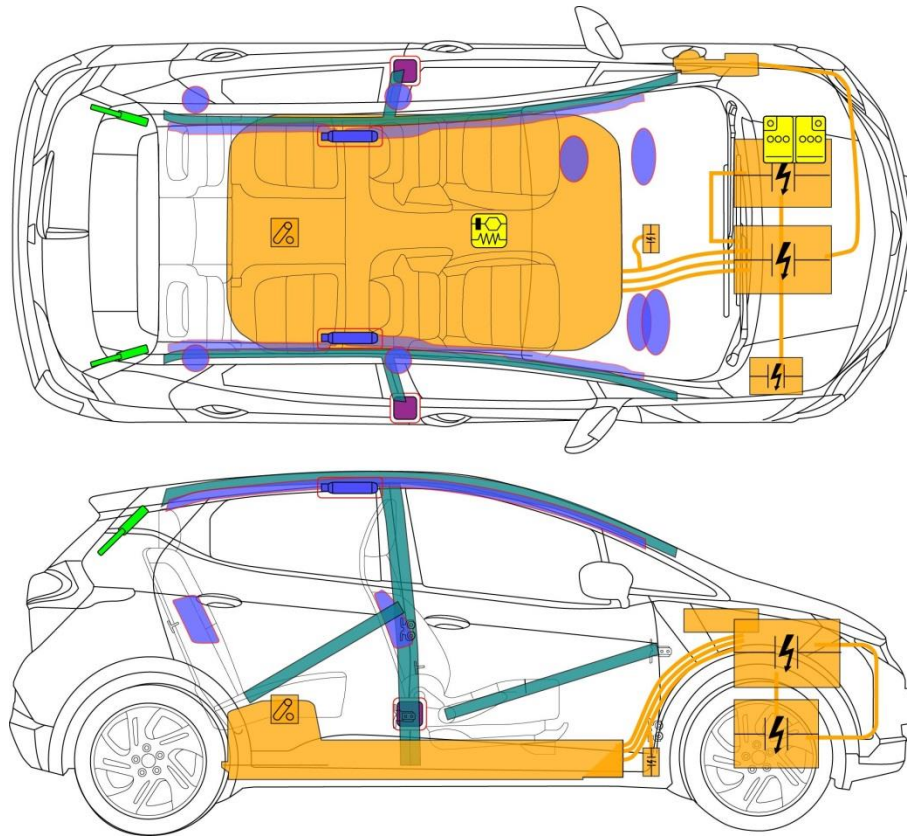

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
	Automatic rollover protection system		Gas strut/Preloaded spring		High strength zone		Zone requiring special attention		
	Battery low voltage		Ultra capacitor, low voltage		Fuel tank		Gas tank		Safety valve
	High voltage battery pack		High voltage power cable component		High voltage disconnect		Fuse box disabling high voltage system		Ultra capacitor, high voltage

1. Identification / recognition




Lack of engine noise does not mean vehicle is off: vehicle movement capability exists until vehicle is fully shut down. Always wear appropriate PPE.

Nameplate

BOLT EV

The BOLT EV can be identified by this emblem that appears on the liftgate of the vehicle.


First Responder Information Label

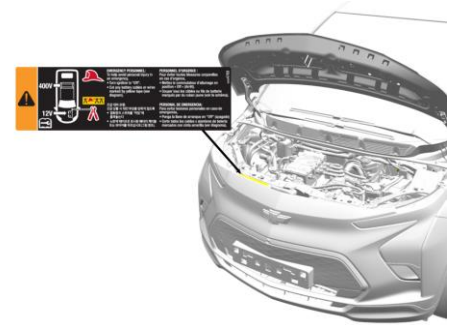


2. Immobilization / stabilization / lifting

IMMOBILIZE VEHICLE:

1. Block the wheels.
2. Pull the Electric Parking Brake (EPB) switch.
3. Press the P (Park) button.

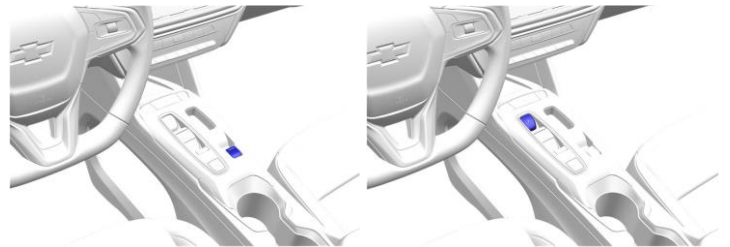

LIFTING POINTS:

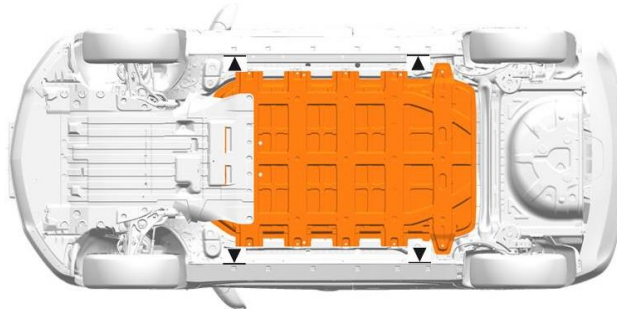

Indicates primary lifting locations.

3. Disable direct hazards / safety regulations


MAIN METHOD:

1. Press the POWER button to disable vehicle propulsion.
2. Remove the keys from the vehicle.
3. Open the hood.
4. Double cut the low voltage cable marked by the yellow tape.

Do NOT cut any orange colored high voltage cables.




After disabling 12-volt power, wait at least 10 seconds to allow any un-deployed airbag reserve energy to dissipate and wait at least 1 minute to allow high voltage energy to discharge.

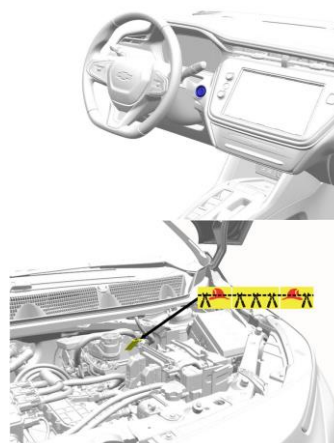

VEHICLE AT CHARGE STATION:


If able, terminate charging by removing the charge handle from the vehicle. If enabled, the vehicle's anti-theft alarm may activate.

Level 2 charge handle is shown; Level 3 (DC Fast Charge) handle is moderately larger and may require additional effort to disconnect.

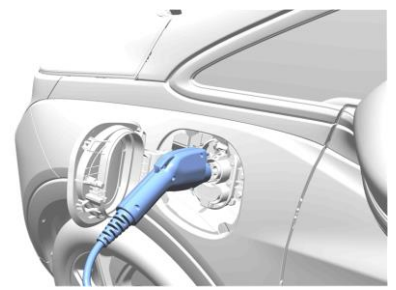


4. Access to the occupants



Refer to the front page for illustrations high strength zones and specific safety related component locations.

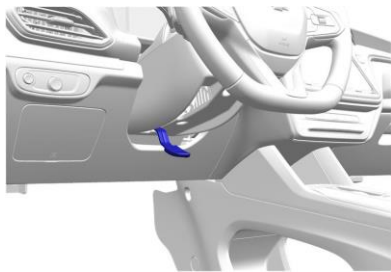

Steering Column Adjustment




Seat Adjustment

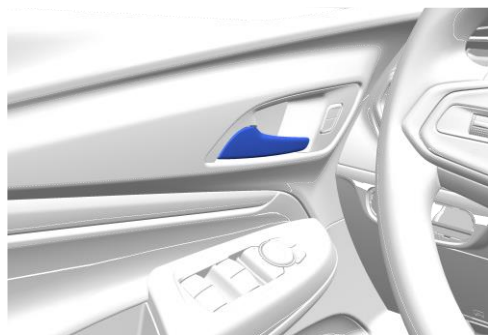

Opening a Locked Door

If the doors remain locked, pull **twice** on the inside door handle to gain access to the occupant at each seating location.

 - The windshield is made of Laminated Glass

 - The side door windows and liftgate window are made of Tempered Glass



5. Stored energy / liquids / gases / solids

Li-ion



Coolant leaking from the battery pack can become unstable and a risk for thermal runaway. Check the battery pack temperature using a thermal imaging camera.

6. In case of fire





Potential for Battery Re-Ignition.



A battery on fire will not explode.



Use copious amounts of water to cool the battery to extinguish the fire.

7. In case of submersion

All high voltage components and the high voltage battery enclosure are connected to the vehicle chassis ground. If the vehicle is immersed in water, you will not be electrocuted by touching the vehicle.


8. Towing / transportation / storage



Front Hook



Rear Hook



Flatbed towing is the best way to transport the vehicle.








9. Important additional information

This vehicle is supported by OnStar, where available.

10. Explanation of pictograms used

	Electric Vehicle		Flammable
	General warning sign		Toxic
	Warning, Electricity		Corrosive

	Battery Technology		Injury Risk
	Lifting Points		Use Water
	Thermal Imaging Camera		